

Parker Brooklyn PT66



Compact Mini Design LED Vapor Tight

Parker Brooklyn PT66 is a compact mini design LED vapor tight fixture with a fast-fit connector and tool-free installation. It is IP65 rated and suitable for wet locations. Its low cost makes it perfect for replacing single T8 fixtures and equipping a wide variety of applications such as metro stations, parking garages, corridors, warehouses, supermarkets and many industrial areas.

FEATURES


- IP65 / IK08
- SDCM <3 or 6
- Up to 140 lm/W
- Linkable Option, Non-Flicker
- Respirator Design
- Up to 70% Energy Savings
- PC Material Available
- Fast Fit and Maintenance Free
- 69,000 Hours (L70 / Ta 25°C), 5 Year Warranty
- Wide Use in Commercial and Industrial Areas
- Match International Food Safety (IFS), BRC and HACCP

APPLICATION

- **INDUSTRIAL**
Warehouses, Production Halls, Corridors
- **EDUCATION**
Classrooms, Cafeterias, Auditoriums, Sports Halls
- **SEMI-OUTDOOR**
Car Garages, Pools, Airports, Train/Bus Stations, Gas Stations, Parks, Toll Stations
- **SHOP & RETAIL**
Shopping Malls, Supermarkets, Retail Stores
- **ARCHITECTURAL**
Exhibition Centers, Libraries, Museums, Concert Halls



SIZE

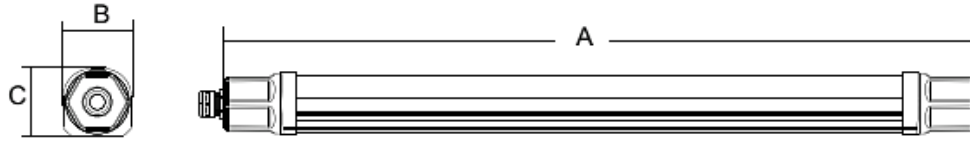

Model No.	Size A (feet)	Size B (inches)	Size C (inches)
PT66	2 FT	2.2"	2.1"
PT66	3 FT	2.2"	2.1"
PT66	4 FT	2.2"	2.1"
PT66	5 FT	2.2"	2.1"

SPECIFICATIONS

MODEL	POWER W	Clear Cover (Without Reflector) LUMENS Im/W	
PT66 (2FT)	20	2400	120
PT66 (3FT)	25	3000	120
PT66 (4FT)	30	3600	120
PT66 (5FT)	35	4200	120

Notes: Above lumens based on 4000K Ra: 80

*Frosted cover is 10 Im/W less than clear cover

TECHNICAL PRODUCT INFORMATION

Operating: -20~+40°C Storage: -40~+85°C

Light Source: 2835

Certification: UL

Beam Angle: 180°

CCT Range: 3000K | 4000K | 5000K | 6500K

AC Input: 100-277V 50/60Hz

Light Efficiency: 120 lm/W

PF: 0.93 THD<20% Power Efficiency: ≥0.90

CRI Range: 80 / 90 / 95

Size (inches): 2(W)* 2(H)

Waterproof: IP65 & IK08

Recommended Installation Height: 6.5-26ft

Function: Linkable

ACCESSORIES

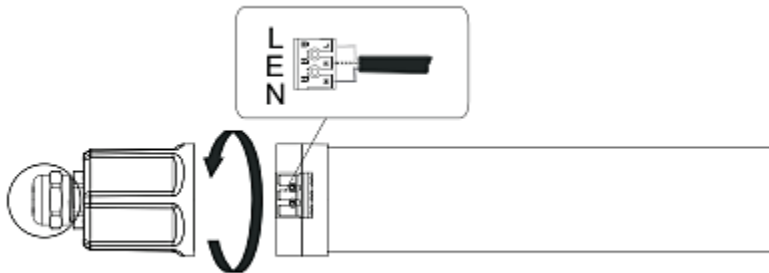


	IMAGE	DESIGNATION	MATERIAL	DESCRIPTION	QUANTITY (pcs)	ACCESSORY USE
Standard Accessories	01	Metal Bracket	Stainless Steel	2" x 1" x .78"	2	Suspension and Ceiling Mount
	02	Screw	Stainless Steel	5/32" x 25/32"	2	Ceiling Mount
Optional Accessories	03	Suspension Cable	Stainless Steel	3' / 4' / 5' / 10'	2	Suspension Mount




INSTALLATION

Standard




Twist the end cap and connect the cable.



CCT switch can adjust 3000K/4000K/5000K.

Linkable

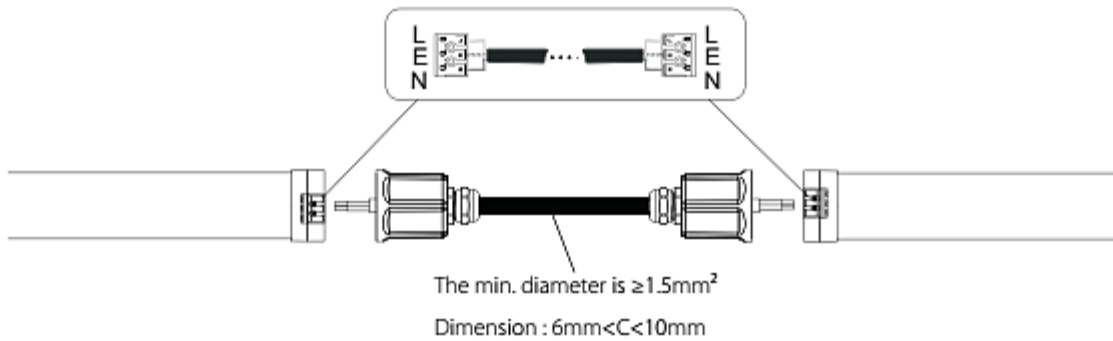

Connect the wire. Lock the waterproof head again.

Input Voltage	Max Qty	Size C (mm)
100VAC/20W	18	optional
100VAC/24W	15	optional
100VAC/25W	14	optional
100VAC/30W	12	optional
100VAC/35W	10	optional
100VAC/40W	9	optional

Input Voltage	Max Qty	Size C (mm)
230VAC/20W	35	optional
230VAC/24W	29	optional
230VAC/25W	28	optional
230VAC/30W	23	optional
230VAC/35W	20	optional
230VAC/40W	18	optional