

# ORDERING FORM

## FIXTURE: PLB Back-Lit LED Panel Brady Series

**EXAMPLE: PLB-R-60W-7500L-24-4K-SK24**      Use for PLB-R Regular Panel

**PLB-PC-40W-5200L-24-4K-HK24**      Use for PLB-PC Power and CCT Tunable Panel

CODE	SIZE	WATTS & LUMENS	KELVIN	ACCESSORIES	
<b>PLB-R</b> Regular  <b>PLB-PC</b> Power & CCT Tunable	<u>REGULAR 125</u>  24 -2 x 4	<u>REGULAR 125</u>  60W – 7500L	3K- 3000K 35K- 3500K 4K- 4000K 5K- 5000K	<u>SURFACE KITS</u> <b>SK14-1x4 KIT</b> <b>SK22-2x2 KIT</b> <b>SK24-2x4 KIT</b>	<u>HANGING KITS</u> <b>HK14-1x4 KIT</b> (3 pcs per kit)  <b>HK22-2x2 KIT</b> (2 pcs per kit)  <b>HK24-2x4 KIT</b> (3 pcs per kit)
	<u>POWER &amp; CCT TUNABLE 130</u>  14-1 x 4	<u>POWER &amp; CCT TUNABLE 130</u>  20W – 2600L 25W – 3250L 30W – 3900L 35W – 4550L			
	22-2 x 2	20W – 2600L 25W – 3250L 30W – 3900L 35W – 4550L			
	24-2 x 4	35W – 4550L 40W – 5200L 45W – 5850L 50W – 6500L			

ACCESSORIES	
 <b>SK-Surface Kits</b>	 <b>HK-Hanging Kits</b>




# Parker Back-Lit LED Panel PLB Brady Series

## FEATURES

- Isolated Driver:** PF $\geq$ 0.9, THD $<$ 15%
- IP40**
- Operating Temperature:** -20°C to 50°C
- Lumen Output:**, 125 lm/W PLB-R  
130 lm/W PLB-PC
- Dimming:** 0 - 10V, AC120-277V
- Lumens:** 130 lm/W **Source:** SMD 2835
- LM80** rated Ra $>$ 80 **Panel Thickness:** 3.5cm
- Color Temperature:** 3000K, 3500K, 4000K, 5000K
- Non-flicker, No yellowing or light leakage**
- More Uniform Illumination**
- Warranty:** 5 Years



PLB-R

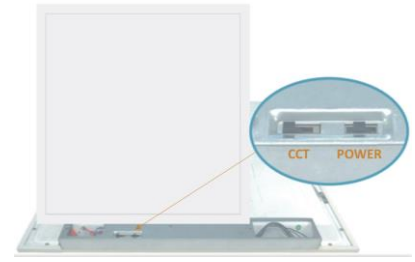

PLB-PC

Note: Selectable Switches for CCT and Power for PLB-PC only, Field Adjustable.

MODELS	ITEM NUMBER	WATTS & LUMENS	DIMENSIONS	ACCESSORIES	
PLB-R REGULAR	PLB-R-60W	60W – 7500L	2' x 4'	<b>SURFACE KITS</b>  <b>SK14</b> – 1 x 4 Kit <b>SK22</b> – 2 x 2 Kit <b>SK24</b> – 2 x 4 Kit  <b>HANGING KITS</b>  <b>HK14</b> – 1 x 4 KIT (3 pcs per kit) <b>HK22</b> – 2 x 2 KIT (2 pcs per kit) <b>HK24</b> – 2 x 4 KIT (3 pcs per kit)	All accessories are for both models.
	PLB-PC POWER & CCT TUNABLE	PLB-PC-20W	20W – 2600L		
PLB-PC-25W		25W – 3250L	1' x 4'		
PLB-PC-30W		30W – 3900L	1' x 4'		
PLB-PC-35W		35W – 4550L	1' x 4'		
PLB-PC-20W		20W – 2600L	2' x 2'		
PLB-PC-25W		25W – 3250L	2' x 2'		
PLB-PC-30W		30W – 3900L	2' x 2'		
PLB-PC-35W		35W – 4550L	2' x 2'		
PLB-PC-35W		35W – 4550L	2' x 4'		
PLB-PC-40W		40W – 5200L	2' x 4'		
PLB-PC-45W	45W – 5850L	2' x 4'			
PLB-PC-50W	50W – 6500L	2' x 4'			